


FLAG_{marker 3}



- Automated marking with flags
- No fluids – clean technology
- Contactless flag application
- Easily integrated into inspection systems

Each FLAGmarker 3 system features:

- HMI screen for monitoring and configuration
- Remote assistance via Ethernet interface
- 24 V inputs and outputs, optionally potential-free interfaces
- Input: trigger flag application
- Output: low on flag material, error
- Round labels (diameter approx. 35mm) at up to 1.5 flags per second

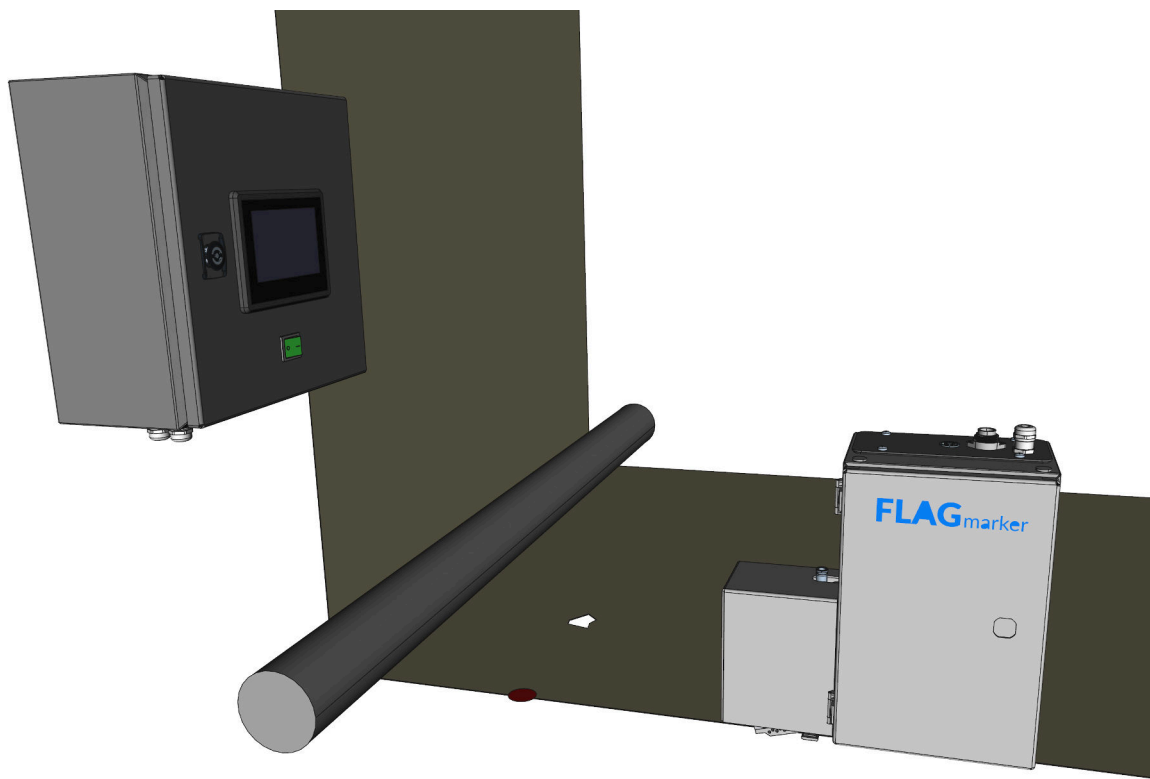

For further information and quotes please contact:

DYETRA.DE